



TECHNICAL UNIVERSITY OF MOMBASA

FACULTY OF ENGINEERING AND TECHNOLOGY

DEPARTMENT OF MECHANICAL & AUTOMOTIVE ENGINEERING

UNIVERSITY EXAMINATION FOR:

BSME/BEME Y4S2

EMG 2418 : PNEUMATICS AND ELECTRO-HYDRAULICS

END OF SEMESTER EXAMINATION

SERIES: APRIL 2016

TIME: 2 HOURS

DATE: 16 May 2016

Instructions to Candidates

You should have the following for this examination

-Answer Booklet, examination pass and student ID

-scientific calculator

-Drawing instruments

This paper consists of **FIVE** questions. Attempt any **THREE** questions.

Do not write on the question paper.

Question ONE

- (a) Outline the **THREE** operations properties unique to pneumatic systems,
(4 marks)
- (b) Explain briefly the **FOUR** operational characteristics of pneumatics system brought about by the compressibility property of air.
(6 marks)
- (c) A load of mass 500 kg is to be lifted to a distance of 600 mm and the available air pressure at point of use is 7 bar. If the load is to be moved the full distance in 3 seconds and the cylinder is to make four complete cycles per minute and allowing for 40% losses in the cylinder and using Table 1 calculate:
(i) the diameter of the air cylinder required'
(ii) the actual air consumption per minute by the cylinder,
(10 marks)

Table1: Standard Air Cylinders

Bore (mm)	80	100	125	140	160
Rod Diameter (mm)	22	26	30	30	36
Stroke (mm)	Up to 750	up to 750	25-1000	30-1000	35-1200

Question TWO

- (a) (i) Explain briefly the principle of operation of a proximity sensor,
- (iii) Illustrate the graphical representation of the following proximity sensors:
 - (I) Magnetic
 - (II) capacitive

(4 marks)
- (b) With the aid of a diagram briefly describe an OR function and the equivalent electrical circuit diagram that can be used in an electro-hydraulic system.

(7 marks)
- (c) Illustrate a typical electrical circuit diagram for electro-hydraulic system clearly indicating the following designation:
 - (I) Transformer
 - (II) Rectifier
 - (III) Switches
 - (IV) Magnetic coils

(9 marks)

Question THREE

- (a) State any TWO installation requirements for each of the following pneumatics component:
 - (i) filter
 - (ii) System
 - (iii) piping

(b) Draw a maintenance schedule that outlines TWO tasks each carried out on pneumatics systems during the following period:

(6 marks)

- (i) weekly
- (ii) Half -yearly
- (iii) Annual

(6 marks)

(c) For each of the following failure symptoms in compressed air system, state the TWO most likely causes and their remedies:

- (i) Air escape from vent hole of the regulator
- (ii) Oil not supplied to air in the lubricator

(8 marks)

Question FOUR

(a) (i) State the THREE advantages and TWO disadvantage of in a pneumatic system in relation to other fluid in power transmission.

(ii) Explain the circumstance under which a lubricator is used in a compressed air system

(6 marks)

(b) Explain with the aid of a graphical diagram the unidirectional speed control in a single-acting cylinder used pneumatic system,

(6 marks)

(c) It is required to lubricate a cylinder of internal diameter of 40 mm and having a stroke of 50 mm and working at gauge pressure of 4 bar. Using Table 2 and assuming an homogeneous mixture throughout the cylinder spread, calculate:

- (i) the maximum length of 8mm copper tube that should be used between the lubricator and the cylinder,
- (ii) Rate of consumption and consumed per minute, if the cylinder in c(i) stroke 3 times in minute with each stroke lasting 0.75

(8 marks)

Table 2 Metric SI units for some standard tube dimensions

Nominal Bore mm	Med Weight Min ID mm	Heavy Weight Min ID mm	ID			Light Gauge		
						OD mm	mm	at 30°C
6	5.8	4.5	3	0.6	1.72	4	2.77	12
8	8.6	7.5	4	0.6	2.72	5	3.55	13
10	12.1	11.0	6	0.8	4.32	6	4.24	13
15	15.8	14.6	8	0.8	6.32	8	5.74	14
20	21.3	20.1	10	0.8	8.32	10	7.24	14
25	26.9	25.3	12	1.0	9.90	12	9.24	11
32	35.6	34.0	16	1.0	13.9	16	12.74	10
40	41.5	39.9				18	14.7	9
50	52.5	50.8				22	18.1	9
65	68.1	66.4				28	23.14	9
80	80.0	78.4						
100	104.0	102.0						
125	129.0	128.0						
150	154.0	153.0						

Question FIVE

- (a) (i) Outline the TWO features that describes the operation of electro-hydraulic system,
(ii) State the THREE advantages of electrical or electronics controls in hydraulic.
(7 marks)
- (b) With the aid of a schematic diagram describe the TWO principal sub-assemblies in an electro-hydraulic system,
(7 marks)
- (c) (i) Illustrate a control loop system of a hydraulic bending cylinder,
(ii) Use a standard system to designate the control elements in the control loop in c (i). (7 marks)

Table 1 Metric SI Units Pressure Reducing Valve Sizing and Capacities

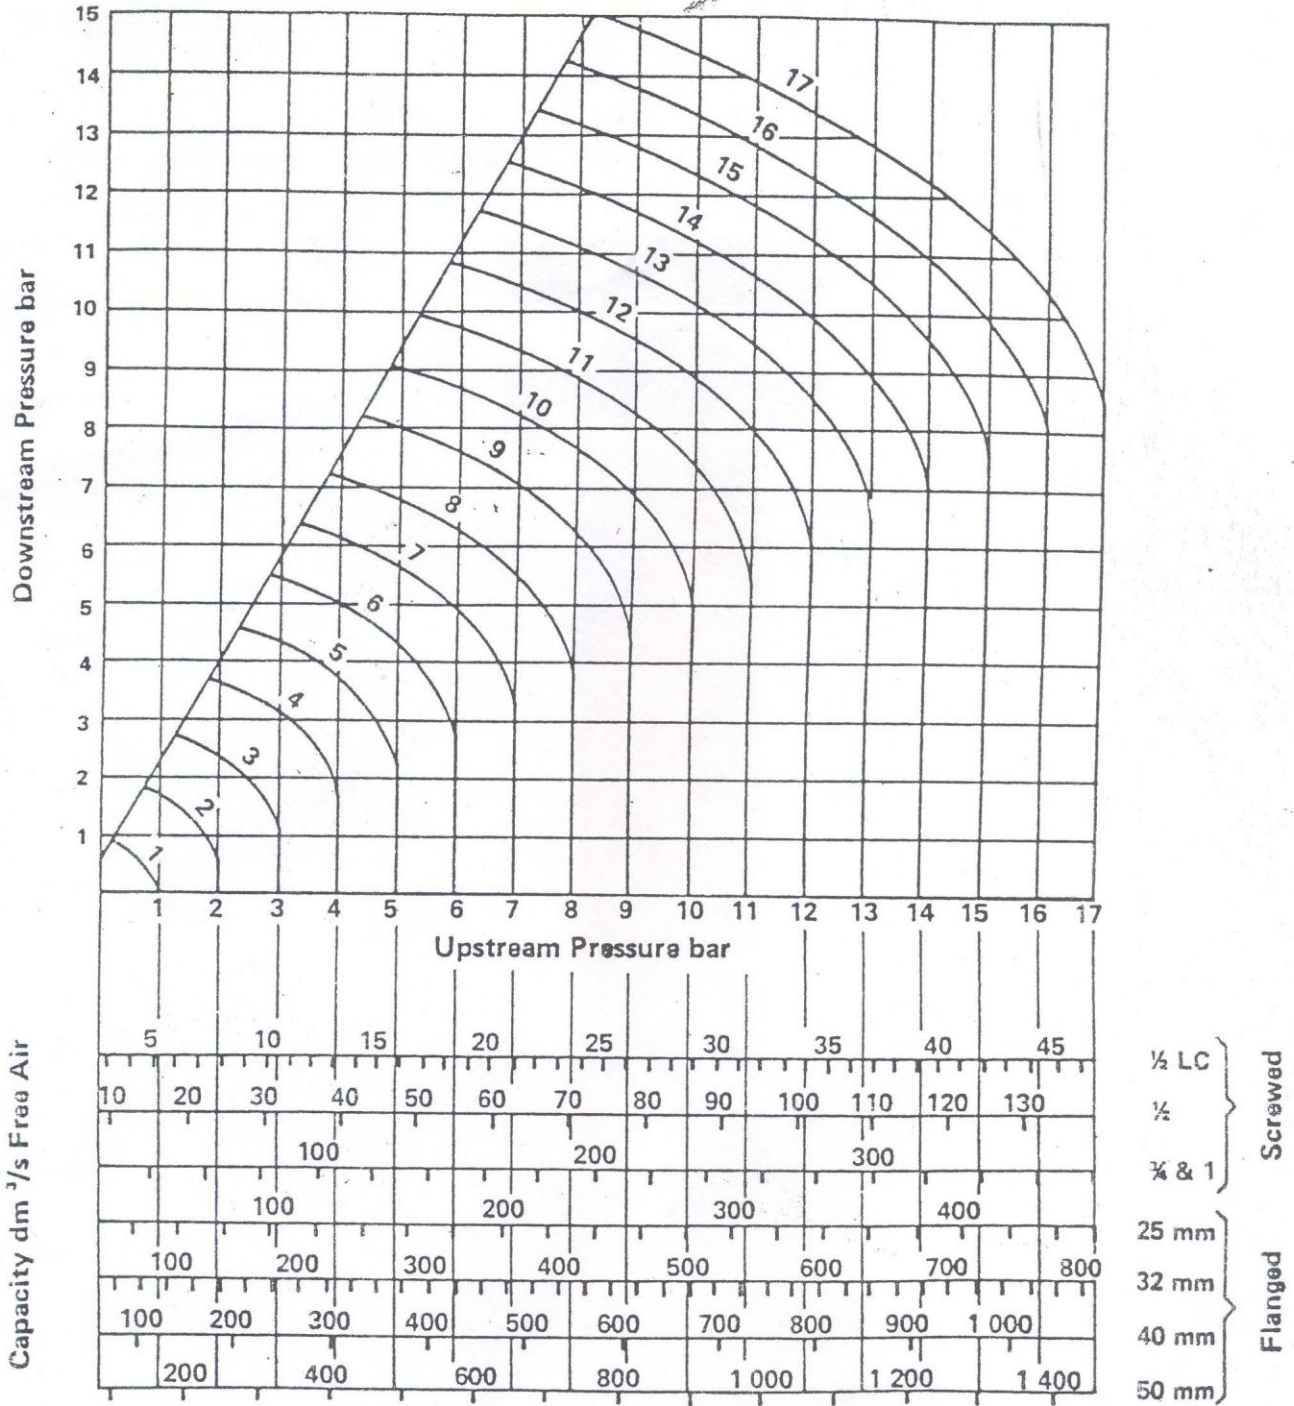


Table 2 Metric SI Units Pressure Drop in Steel Pipes (15 mm to 100 mm)


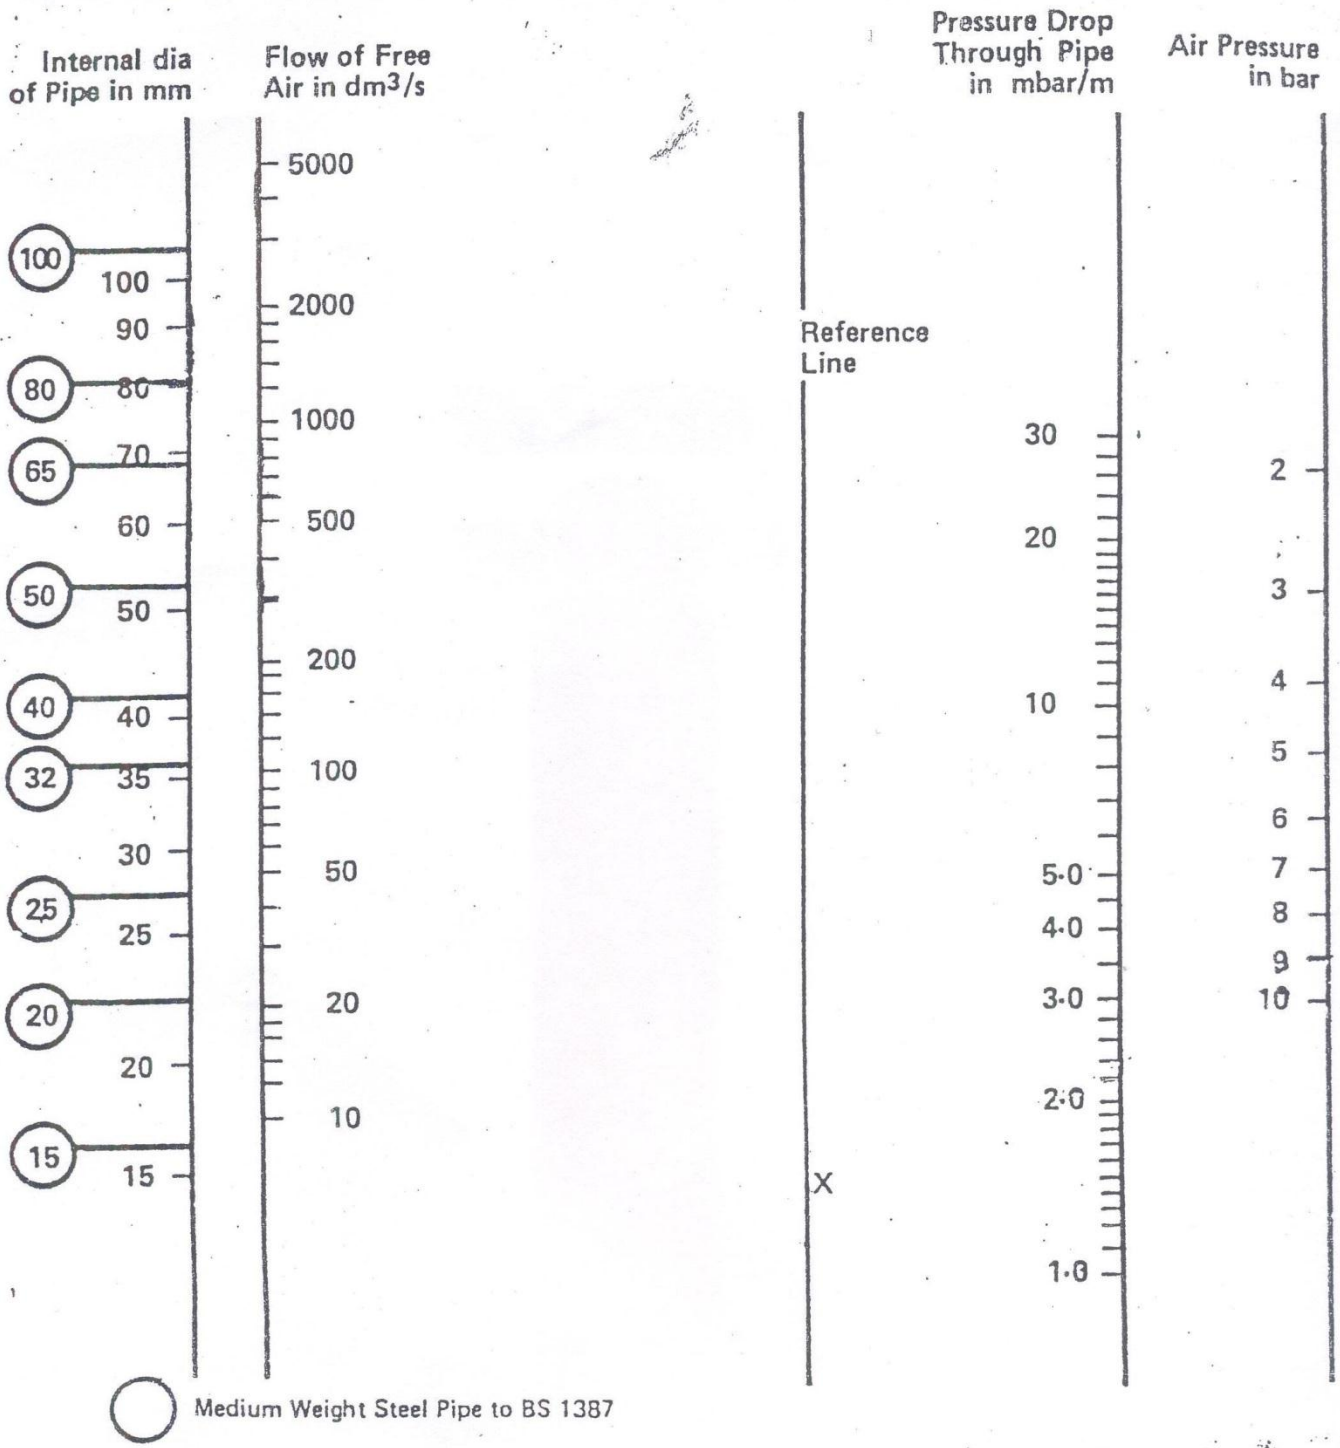


Table 3 Metric SI Units Pressure Drop in Pipes and Tubes (2.5 mm to 15 mm)

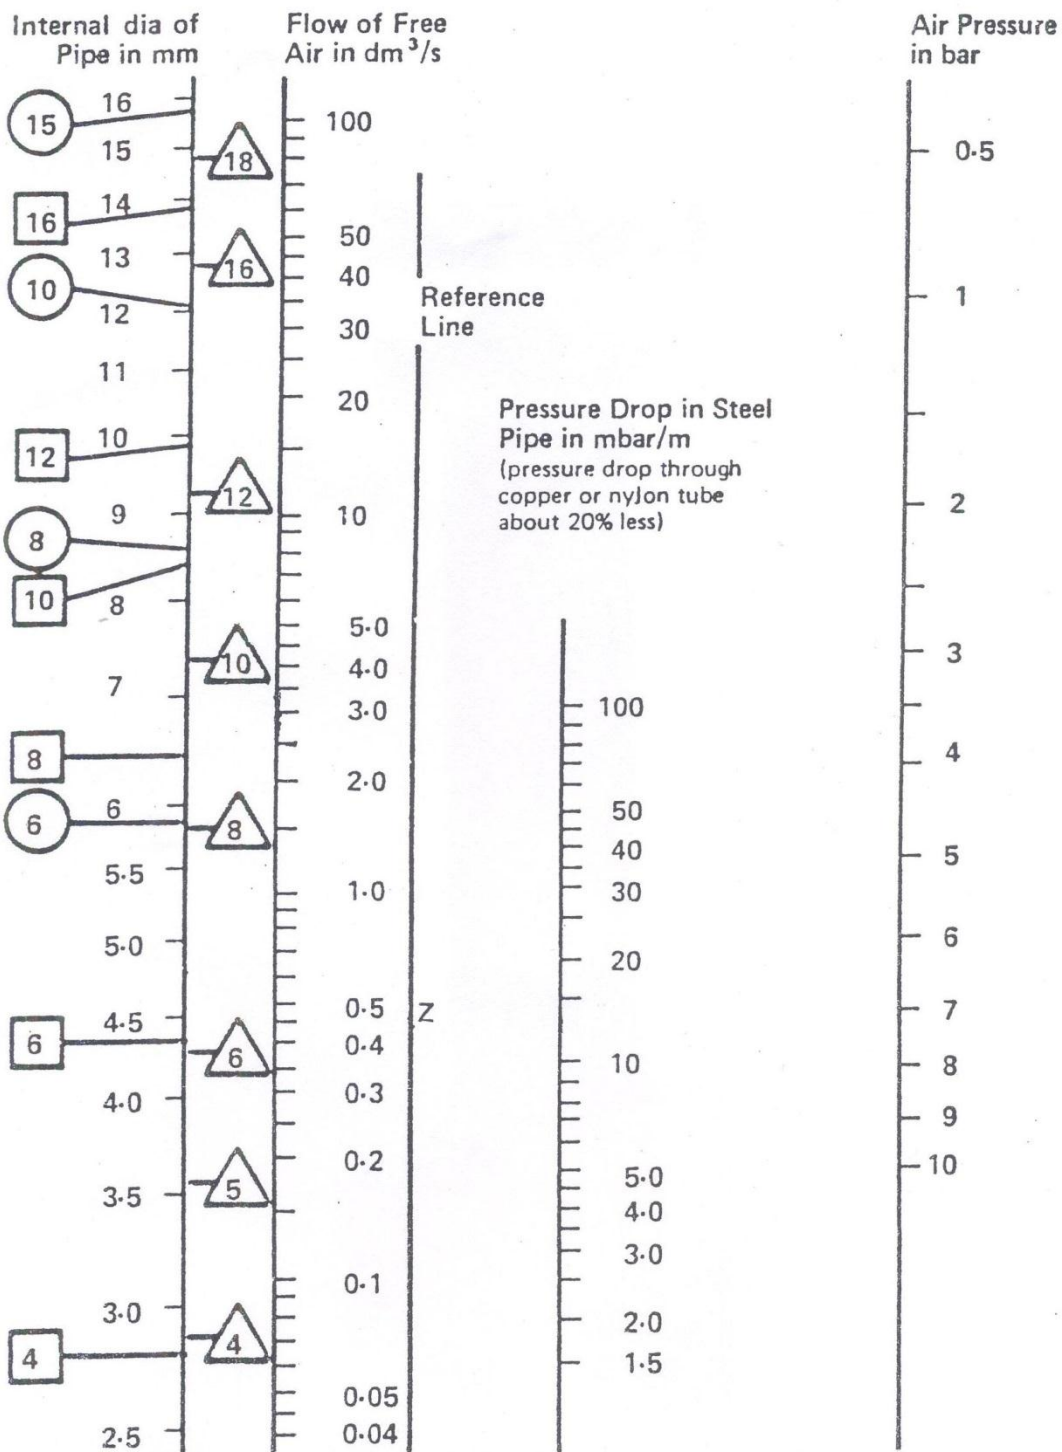

○ Medium Weight Steel Tube BS 1387

□ Copper Tube to BS 2871 Pt II Table 4 (medium)

△ Nylon Tube CETOP RP54P