



TECHNICAL UNIVERSITY OF MOMBASA

FACULTY OF ENGINEERING AND TECHNOLOGY

DEPARTMENT OF MECHANICAL & AUTOMOTIVE ENGINEERING

UNIVERSITY EXAMINATION FOR:

DIPLOMA IN MECHANICAL ENGINEERING

EME 2108: ENGINEERING DRAWING II

END OF SEMESTER EXAMINATION

SERIES: APRIL 2016

TIME: 2 HOURS

DATE: Pick Date Select Month Pick Year

Instructions to Candidates

You should have the following for this examination

-Answer Booklet, drawing instruments, examination pass and student ID

This paper consists of **FIVE** questions. Attempt question ONE (Compulsory) and any other TWO questions.

Do not write on the question paper.

Question ONE (COMPULSORY)

Figure Q.1 shows details parts of a pulley block. Draw to full scale in the first angle orthographic projection the following views

- i. Front elevation of correctly assembled pulley block
- ii. Sectional end elevation along plane A-A
- iii. Prepare a part list (20mks)

Question TWO

A cam is to give the following motion to a knife-edge follower:

Outstroke during 60° of the cam rotation;

Dwell for the following 30° of the cam rotation;

Return stroke during the next 30° of the cam rotation, and Dwell for the remaining 210° of the cam rotation.

The stroke of the follower is 40mm and the minimum radius of the cam is 50mm. The follower moves with uniform velocity during both the outstroke and return stroke. Draw the profile of the cam when the axis of the follower is offset 20mm from the axis of the cam shaft. (20mks)

Question THREE

- a) With the aid of neat sketches, define the following screw thread terminologies.
- Pitch
 - Effective diameter (*4mks*)
- b) Construct ISO Metric Screw Thread with the form of an external (male) thread M36 X 4 to a scale of 10:1(*4mks*)
- c) Construct the profile for a single –start right –hand square thread with major diameter 60mm and lead 24mm, scale 1:1 (*12mks*)

Question FOUR

Figure Q.4 is the frustum of a right cone. Draw this elevation and a plan. Draw the true shape of the face AB.(*20mks*)

Question FIVE

- a) Illustrate with diagrams the following types of fits:
- clearance fit
 - transition fit
 - interference fit(*6mks*)
- b) Define the maximum and minimum limits of size, for the hole and shaft, in the following rating systems:
- 220mm H7/p6
 - 65mm H8/f7
 - 12.5mm H7/k7(*6mks*)
- c) Figure Q.5 shows a sectional bush shaft assembly. Use BS4500 selected ISO fits table to find the limits and fits between:
- bush and housing
 - bush and shaft(*8mks*)

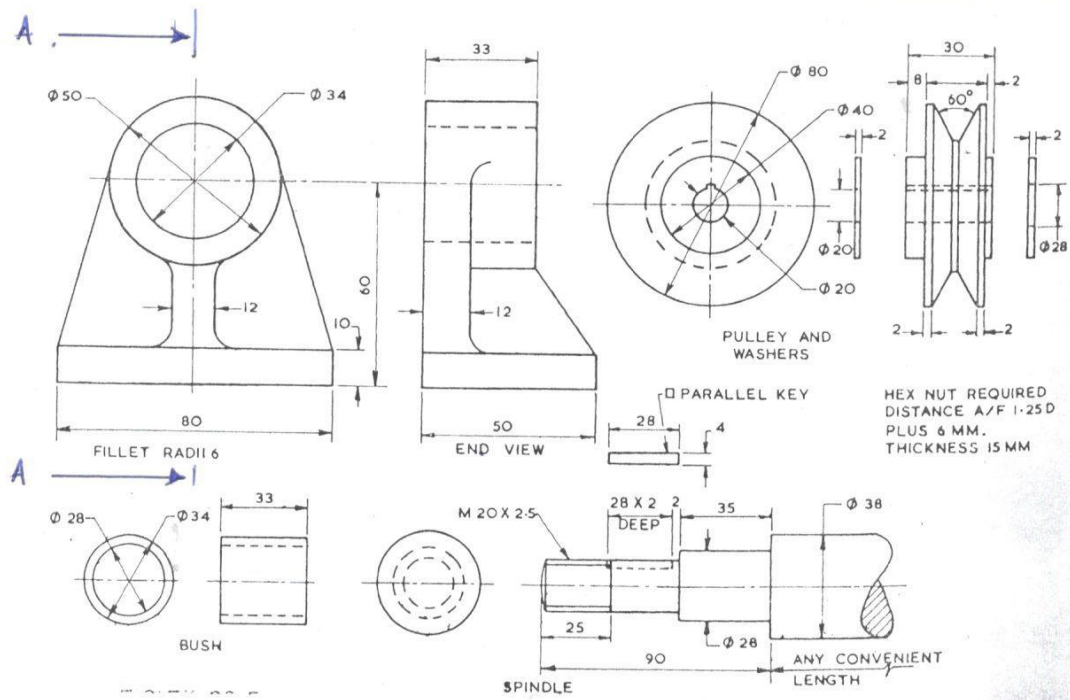


FIGURE Q.1: PULLEY BLOCK




FIGURE Q.4


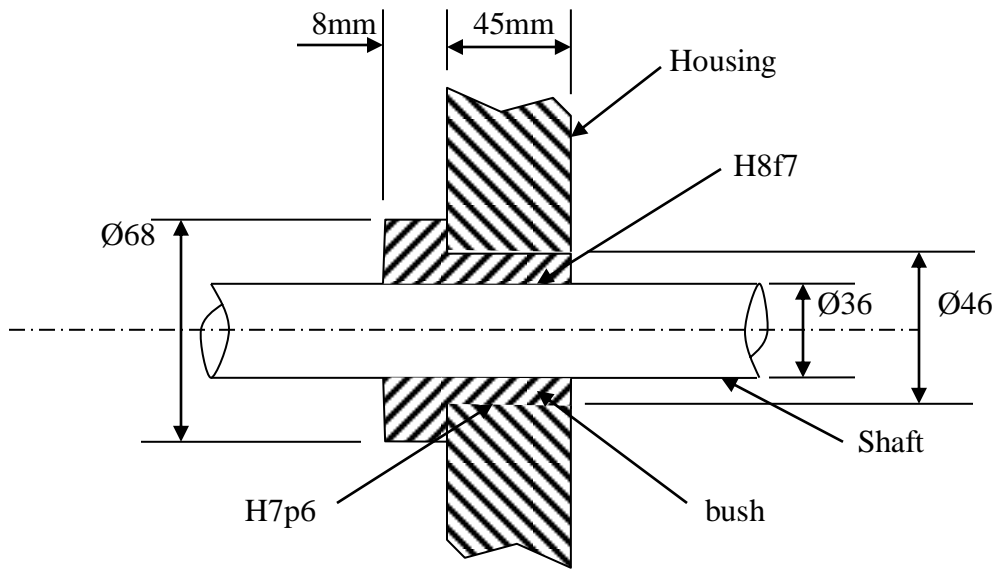


FIGURE Q.5

Extracted from
BS 4500 : 1969

BRITISH STANDARD SELECTED ISO FITS—HOLE BASIS

Data Sheet
4500A
Issue 1, February 1970
confirmed August 1985

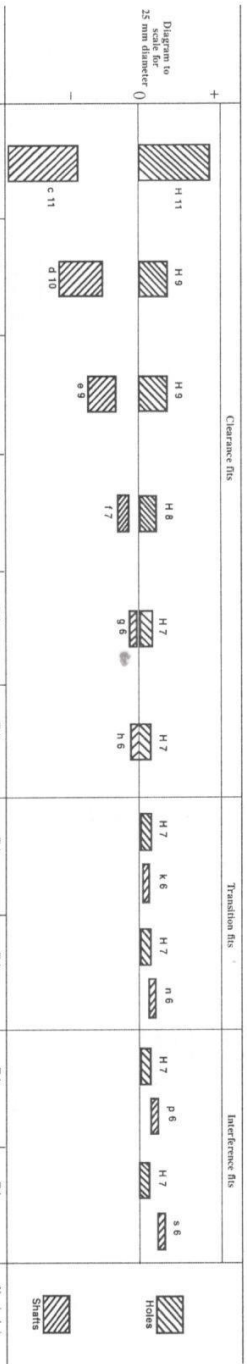

Nominal sizes	Hole		Tolerance		Tolerance		Tolerance		Tolerance		Tolerance		Tolerance		Tolerance		Tolerance		Nominal sizes			
	To	H11	H9	d10	H9	e9	H8	f7	H7	g6	H7	H6	H7	k6	H7	n6	H7	p6	H7	s6	To	
mm	mm	(0.001 mm)	(0.001 mm)	(0.001 mm)	(0.001 mm)	(0.001 mm)	(0.001 mm)	(0.001 mm)	(0.001 mm)	(0.001 mm)	(0.001 mm)	(0.001 mm)	(0.001 mm)	(0.001 mm)	(0.001 mm)	(0.001 mm)	(0.001 mm)	(0.001 mm)	(0.001 mm)	(0.001 mm)	mm	mm
3	+0.090	-0.050	+0.250	-0.200	+0.250	-0.150	+0.140	-0.060	+0.100	-0.020	+0.100	-0.060	+0.100	+0.060	+0.100	+0.100	+0.100	+0.120	+0.120	+0.120	—	3
6	+0.075	-0.045	+0.300	-0.250	+0.300	-0.200	+0.180	-0.100	+0.120	-0.020	+0.120	-0.080	+0.120	+0.090	+0.120	+0.120	+0.120	+0.120	+0.120	+0.120	6	6
10	+0.090	-0.050	+0.300	-0.250	+0.300	-0.200	+0.220	-0.120	+0.120	-0.020	+0.120	-0.080	+0.120	+0.090	+0.120	+0.120	+0.120	+0.120	+0.120	+0.120	10	10
18	+0.110	-0.055	+0.430	-0.350	+0.430	-0.250	+0.270	-0.160	+0.180	-0.020	+0.180	-0.110	+0.180	+0.120	+0.180	+0.180	+0.180	+0.180	+0.180	+0.180	18	18
30	+0.160	-0.080	+0.620	-0.500	+0.620	-0.350	+0.390	-0.250	+0.250	-0.020	+0.250	-0.160	+0.250	+0.180	+0.250	+0.250	+0.250	+0.250	+0.250	+0.250	30	30
40	+0.190	-0.100	+0.710	-0.600	+0.710	-0.400	+0.460	-0.300	+0.300	-0.020	+0.300	-0.190	+0.300	+0.210	+0.300	+0.300	+0.300	+0.300	+0.300	+0.300	40	40
50	+0.230	-0.130	+0.870	-0.750	+0.870	-0.450	+0.540	-0.360	+0.350	-0.020	+0.350	-0.220	+0.350	+0.350	+0.350	+0.350	+0.350	+0.350	+0.350	+0.350	50	50
65	+0.290	-0.170	+1.000	-0.850	+1.000	-0.500	+0.630	-0.430	+0.400	-0.020	+0.400	-0.250	+0.400	+0.380	+0.400	+0.400	+0.400	+0.400	+0.400	+0.400	65	65
80	+0.320	-0.200	+1.100	-0.950	+1.100	-0.550	+0.680	-0.480	+0.400	-0.020	+0.400	-0.280	+0.400	+0.380	+0.400	+0.400	+0.400	+0.400	+0.400	+0.400	80	80
100	+0.350	-0.230	+1.150	-1.000	+1.150	-0.600	+0.710	-0.500	+0.400	-0.020	+0.400	-0.300	+0.400	+0.380	+0.400	+0.400	+0.400	+0.400	+0.400	+0.400	100	100
120	+0.380	-0.260	+1.200	-1.050	+1.200	-0.650	+0.760	-0.550	+0.400	-0.020	+0.400	-0.320	+0.400	+0.380	+0.400	+0.400	+0.400	+0.400	+0.400	+0.400	120	120
140	+0.400	-0.280	+1.250	-1.100	+1.250	-0.700	+0.810	-0.600	+0.400	-0.020	+0.400	-0.340	+0.400	+0.380	+0.400	+0.400	+0.400	+0.400	+0.400	+0.400	140	140
160	+0.420	-0.300	+1.300	-1.150	+1.300	-0.750	+0.860	-0.650	+0.400	-0.020	+0.400	-0.360	+0.400	+0.380	+0.400	+0.400	+0.400	+0.400	+0.400	+0.400	160	160
180	+0.440	-0.320	+1.350	-1.200	+1.350	-0.800	+0.910	-0.700	+0.400	-0.020	+0.400	-0.380	+0.400	+0.380	+0.400	+0.400	+0.400	+0.400	+0.400	+0.400	180	180
200	+0.460	-0.340	+1.400	-1.250	+1.400	-0.850	+0.960	-0.750	+0.400	-0.020	+0.400	-0.400	+0.400	+0.380	+0.400	+0.400	+0.400	+0.400	+0.400	+0.400	200	200
225	+0.480	-0.360	+1.450	-1.300	+1.450	-0.900	+1.010	-0.800	+0.400	-0.020	+0.400	-0.420	+0.400	+0.380	+0.400	+0.400	+0.400	+0.400	+0.400	+0.400	225	225
250	+0.500	-0.380	+1.500	-1.350	+1.500	-0.950	+1.060	-0.850	+0.400	-0.020	+0.400	-0.440	+0.400	+0.380	+0.400	+0.400	+0.400	+0.400	+0.400	+0.400	250	250
280	+0.520	-0.400	+1.550	-1.400	+1.550	-1.000	+1.110	-0.900	+0.400	-0.020	+0.400	-0.460	+0.400	+0.380	+0.400	+0.400	+0.400	+0.400	+0.400	+0.400	280	280
315	+0.540	-0.420	+1.600	-1.450	+1.600	-1.050	+1.160	-0.950	+0.400	-0.020	+0.400	-0.480	+0.400	+0.380	+0.400	+0.400	+0.400	+0.400	+0.400	+0.400	315	315
355	+0.560	-0.440	+1.650	-1.500	+1.650	-1.100	+1.210	-1.000	+0.400	-0.020	+0.400	-0.500	+0.400	+0.380	+0.400	+0.400	+0.400	+0.400	+0.400	+0.400	355	355
400	+0.580	-0.460	+1.700	-1.550	+1.700	-1.150	+1.260	-1.050	+0.400	-0.020	+0.400	-0.520	+0.400	+0.380	+0.400	+0.400	+0.400	+0.400	+0.400	+0.400	400	400
450	+0.600	-0.480	+1.750	-1.600	+1.750	-1.200	+1.310	-1.100	+0.400	-0.020	+0.400	-0.540	+0.400	+0.380	+0.400	+0.400	+0.400	+0.400	+0.400	+0.400	450	450
500	+0.620	-0.500	+1.800	-1.650	+1.800	-1.250	+1.360	-1.150	+0.400	-0.020	+0.400	-0.560	+0.400	+0.380	+0.400	+0.400	+0.400	+0.400	+0.400	+0.400	500	500