

# *TECHNICAL UNIVERSITY OF MOMBASA*

---

*Faculty of Engineering and Technology*

*Department of Electrical and Electronic engineering*

**UNIVERSITY EXAMINATION:**

*Diploma in Electrical Power Engineering*

*Electrical Power systems II*

**EEP 2302**

**END OF SEMESTER EXAMINATION**

**SERIES: DEC 2016**

**TIME: 2 HOURS**

**Instructions to Candidates**

You should have the following for this examination

-Answer Booklet, examination pass and student ID

This paper consists of **five** Questions;. Attempt any **THREE** Questions.

**Do not write on the question paper.**

---

### Question ONE

(a) Explain the following with reference to underground cables:

- (i) Void formation
- (ii) Effect of voids
- (iii) How void formation can be prevented

(11marks)

(b) With the aid of a labeled diagram for a single core cable derive the expression for:

- (i) Capacitance
- (ii) Maximum and minimum dielectric stress

(9 marks)

### Question TWO

(a) With reference to power systems explain:

- (i) Stability
- (ii) Steady state stability
- (iii) Dynamic stability
- (iv) Transient stability
- (v) Hunting

(10 marks)

**(b) Explain the following electrical power transmission terms:**

- (i) Feranti effect**
- (ii) Regulation**
- (iii) Transmission efficiency

(10 mark)

Question THREE

(a) State FOUR factors that affect the temperature rise of a cable. (4 marks)

(b) (i) Explain the meaning of graded insulation.

(ii) State the practical difficulties experienced when using grade insulation. (4 marks)

(c) The cross-section of an 11KV single core lead sheathed cable with graded insulation is as in Figure 1 below. The relative permittivities of dielectrics  $\epsilon_{r1}$  are 4.8 and 3.2 respectively. Determine the minimum and maximum values of:

(i) Dielectric stress for each dielectric

(ii) Dielectric stress for cable having the same dimensions and homogeneous insulation

(12 marks)

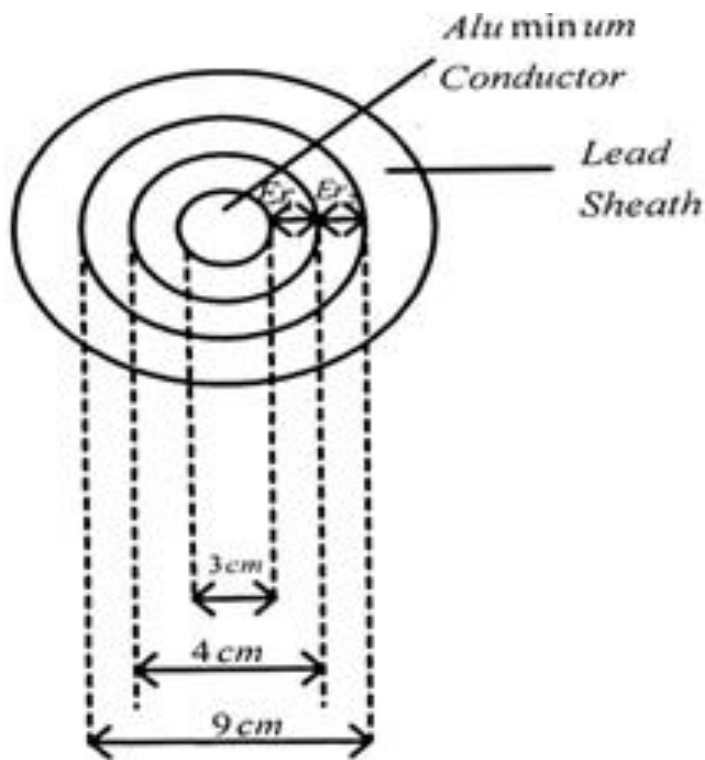


Fig. 1

Question FOUR

(a) Explain why the neutral point of a power system is earthed. (4 marks)

(b) Explain the relative merits of the following:

(i) *Solid earthing*

(ii) Resistance earthing

(iii) Reactance earthing

(6 marks)


(e) With the aid of a diagram explain the method of earthing through a voltage transformer and state its advantages and application. (10 marks)

Question FIVE

(a) State the theory of symmetrical components in an unbalanced system. (6 marks),

(b) For Figure2:

If  $V_a = 5 \angle 53^\circ$ ,  $V_b = 7 \angle -164^\circ$ ,  $V_c = 7 \angle 105^\circ$  Determine the symmetrical components

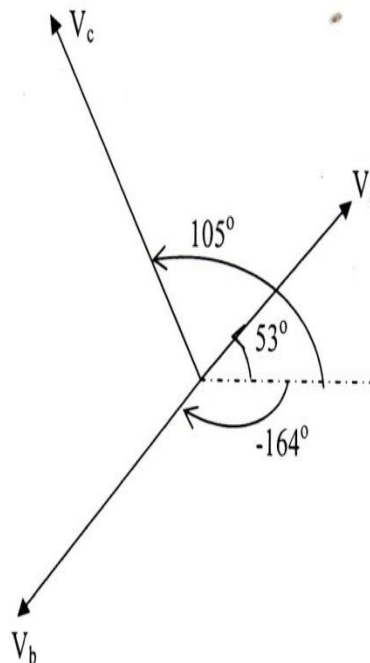

14 marks